

MT200-IR10-Fio-PM-Ic

MT250-IR6-Fio-PM-Ic

FIBRE PIGTAILED MODULATOR/SHIFTER 1000-1100 nm

FIBRE PIGTAILED MODULATOR/SHIFTER 1000-1100 nm





Product Overview

These Compact fibre pigtailed devices are optimized for a single wavelength in [1000-1100] nm. They can operate for intensity modulation, fixed or variable frequency shifting around 200 and 250 MHz, and pulse picking applications. They have been developed for industrial applications in order to offer the best performances and stability.

Features

- Polarization Maintaining Fibres
- FC/APC connectors
- Positive frequency shift
- High extinction ratio
- Industrial Compact design

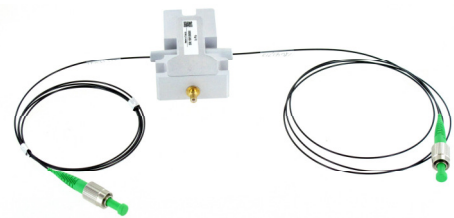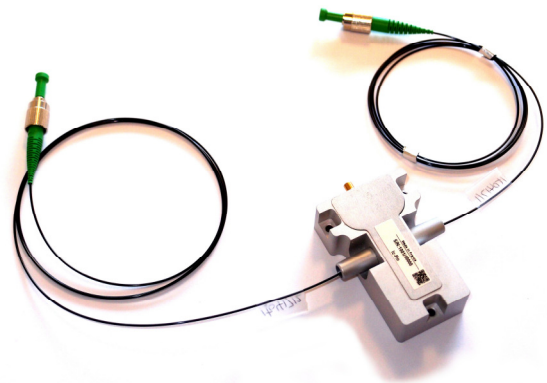

Access to your operating manual



TECHNICAL DATA SHEET 2015

Technical Specifications

| Parameters | MT200-IR10-Fio-PM-Ic | MT250-IR6-Fio-PM-Ic |
|---------------------------------------|---|--------------------------------------|
| Material-Acoustic mode-Velocity | TeO2 - [L] - 4200 m/s | |
| Optical Wavelength range | In [1000-1100nm] | |
| IL, Insertion Losses | < 5 dB, nom 3 dB | < 6 dB, nom 3.5 dB |
| Input / Output Polarization | Linear / PM fibres | |
| PER, Polarization Extinction Ratio | >18dB, nom >20dB | |
| PDL, Polarization Dependence Losses | < 0.6 dB | < 0.8 dB |
| Carrier frequency / Frequency shift | + 200 MHz (positive frequency shift) | + 250 MHz (positive frequency shift) |
| Static Extinction Ratio | > 45 dB, nom 50 dB | |
| Rise / Fall time | 10 ns | 6 ns |
| Analog Amplitude modulation bandwidth | Max 48 MHz (-3dB) | Max 80 MHz (-3 dB) |
| Jacket type | 900 µm HYTREL TUBING | |
| Fibre connectors | FC/APC | |
| Pigtail length | 1 meter (IN/OUT) | |
| Max Input laser power (CW) | ≤ 1 W | ≤ 0.5 W |
| Input impedance | Nom 50 Ω | |
| V.S.W.R. | Nom < 1.2/1 | |
| RF Power / Connector | < 2.2 W / SMA | < 1.8 W / SMA |
| Size / Weight | (Lxlxh) 60 x 40 x 16 mm ³ / 60 g | IN PRO 333 |
| Operating Temperature | +10 to +40 Non condensing | |
| Storage Temperature | -40 to +50 Non condensing | |

Rise Time (T_r) is beam diameter (Φ) sensitive:

$$T_r = 0.66 \frac{\Phi}{V}$$

Insertion Loss (IL) is the amount of launched light lost within the Acousto-Optic Modulator (AOM). It is defined as the ratio of the input optical power over the output optical power.

The value of IL indicated in datasheet includes optical transmission through the crystal, diffraction efficiency and coupling losses. Losses at FC connectors are not included.

Polarization dependence loss (PDL) is when the insertion loss of a signal differs between the two different states of polarization. Polarization Dependent Loss is a measure of the peak-to-peak difference in Transmission of the AOM with respect to all possible states of polarizations.

It is defined as the ratio between the maximum and minimum transmission power with respect to all possible axes of polarization.

The PDL of the acousto-optic devices is mainly due to the polarization dependency of the diffraction efficiency.

Amplitude modulation bandwidth (F_{-3dB}) is rise time (T_r) sensitive:

$$F_{-3dB} = \frac{0.48}{T_r}$$


RF power (P) is wavelength (λ) sensitive:

$$\frac{P_1}{P_2} = \frac{\lambda_1^2}{\lambda_2^2}$$


PMD (Polarization Mode Dispersion) is the differential arrival time of the different polarization components of an input light pulse, transmitted by the AOM. This light pulse can always be decomposed into pairs of orthogonal polarization modes. These polarization modes propagate at different speeds according to a slow and fast axis induced by the birefringence of the AOM.

Second Order PMD: The second order PMD describes how polarization induced delay, varies with wavelength. It provides the indication of the wavelength dependency of the PMD.


Relative Efficiency versus RF power

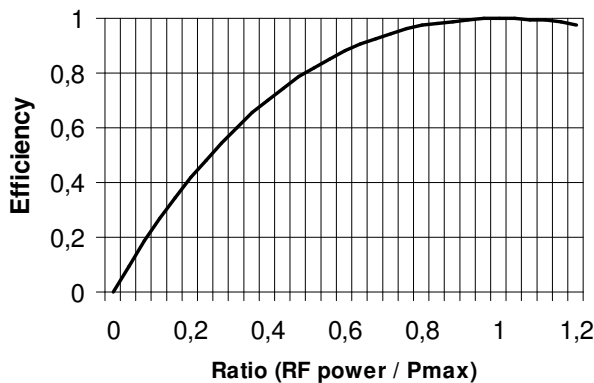


AO relative Efficiency vs driver MOD IN

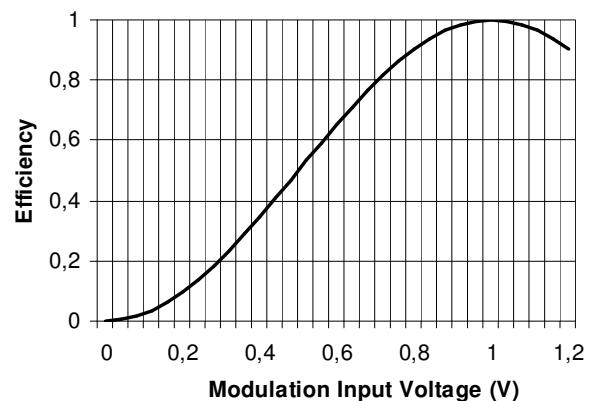

MT250 PPK Response to a 80MHz Rep Rate Laser

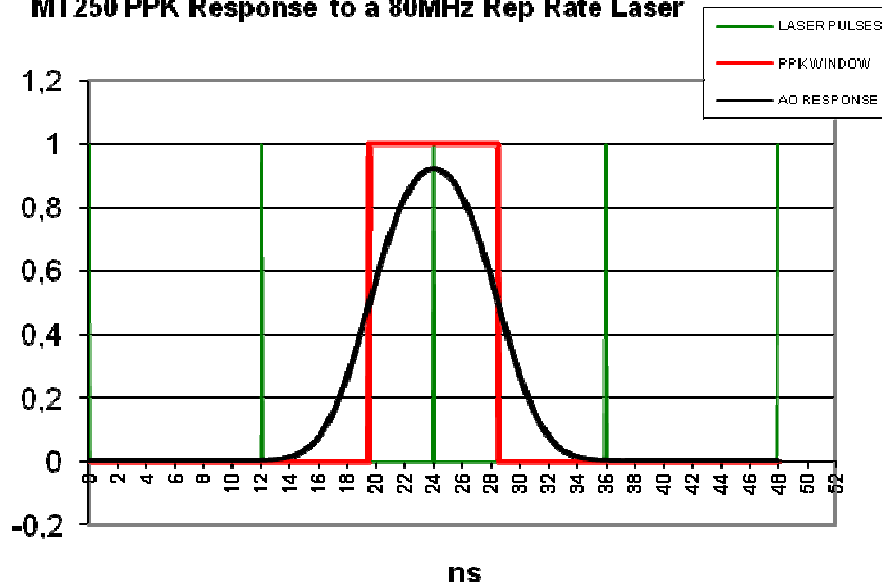

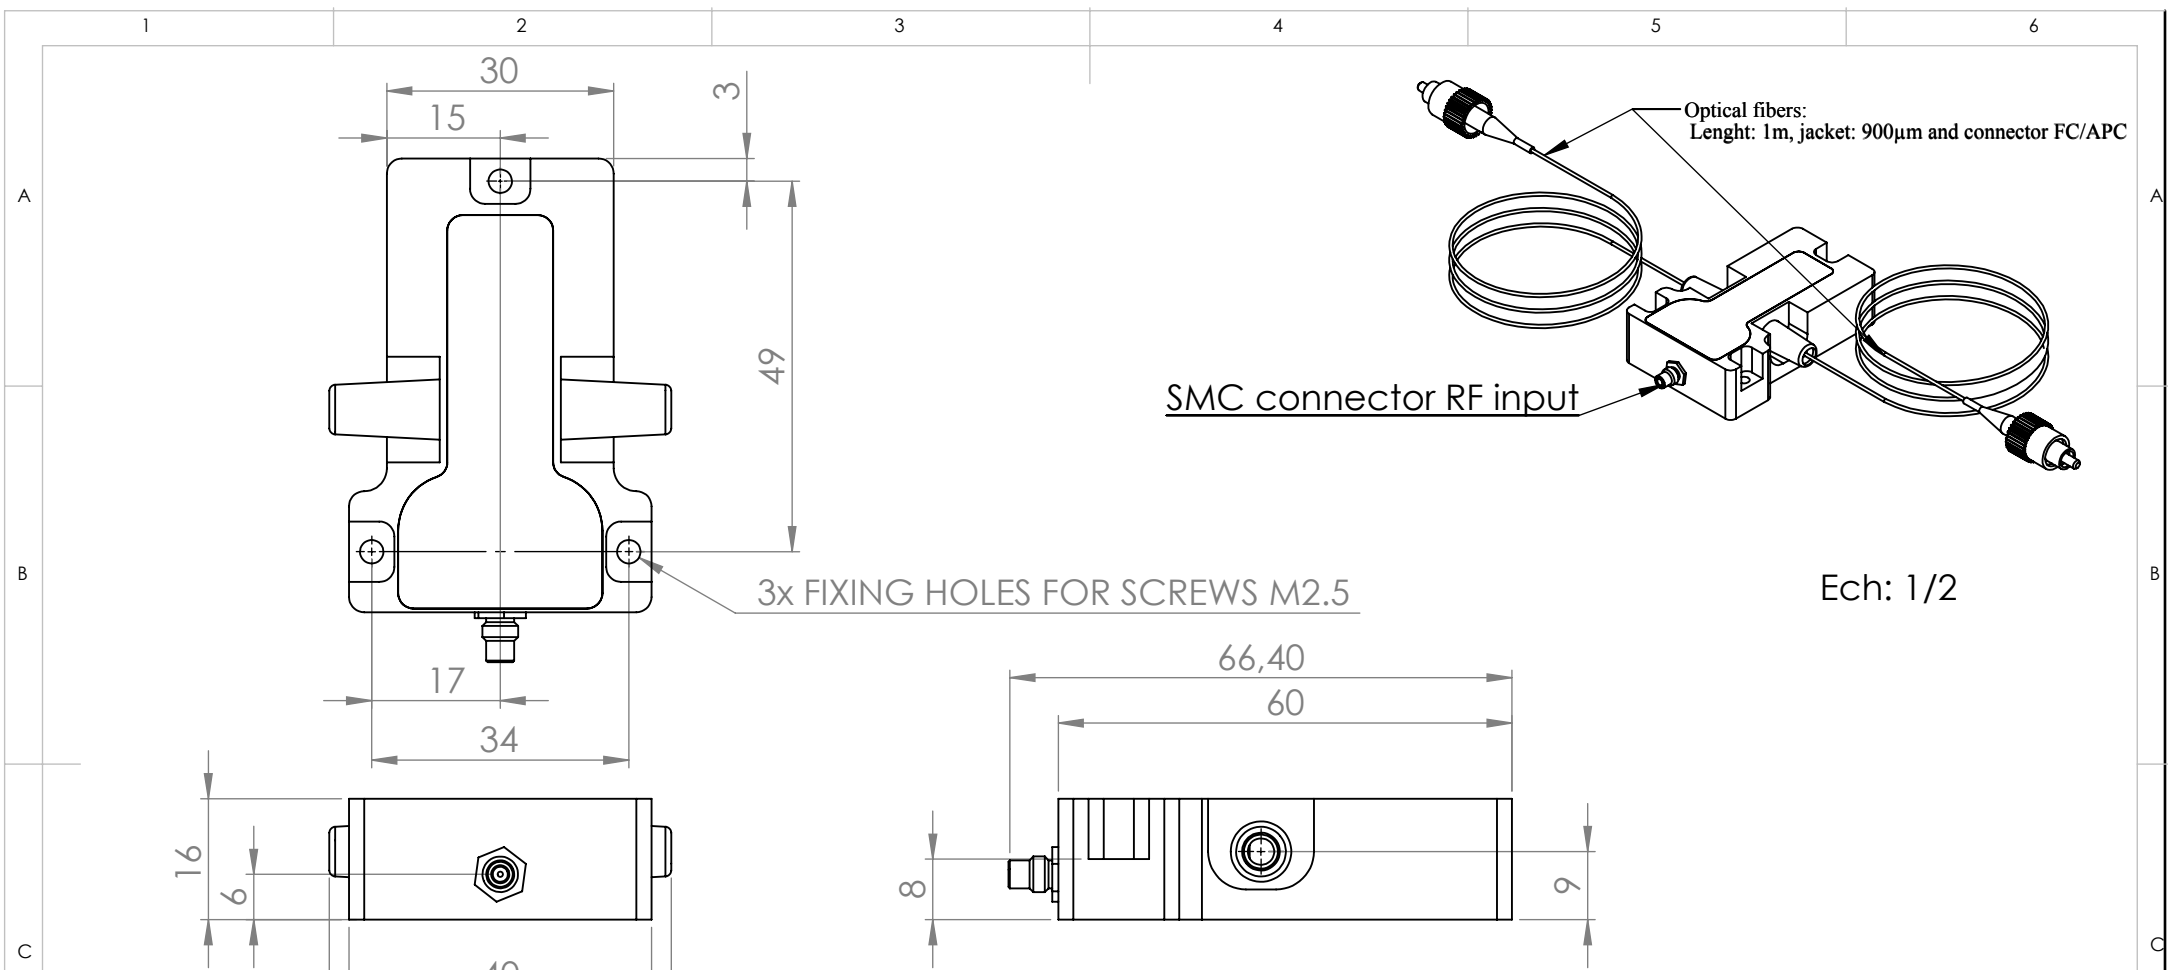

| | | | | | |
|-----------------------|------------|---------------|--|------------------------|-------------------|
| A | 17/10/14 | G.M | Plan initial / Initial plan | | |
| Indice Index | Date | Auteur Author | Modifications | | |
| Conception Design | GM | | Désignation / Designation PLAN D'INTERFACE Référence / Reference IN-PRO-333 | | |
| Vérification Checking | PS | | | | |
| Tolérance Tolerance | ISO 2768mK | | | | |
| Echelle Scale | 1:1 | | Matière / Material | Traitement / Treatment | Finition / Finish |
| | Format A4 | | Ce document est la propriété de A.A.SA. Il est strictement interdit de reproduire ce document ou une partie sans l'autorisation de A.A.SA. This document is the property of A.A.SA. It is strictly prohibited to reproduce this document or a part without the authorization of A.A.SA. | | |
| | | | Folio / Sheet 1/1 | Indice / Index A | |



A.A. SA OPTO-ELECTRONIC DIVISION
 18, rue Nicolas Appert
 F-91898 ORSAY
 tel : 08 11 09 76 76
 fax : 01 76 91 50 31