

AMPB8X-D-3x-10.500 - AMPB8X-D-3x-10.900

FEATURES

- 8 outputs
- 1, 2.5, 4 Watts
- Rack 19", 1U
- 110-230 VAC




SPECIFICATIONS (T=25°C)


PARAMETER	RATING	UNIT
Number of outputs	8	
Output selector	8 switches ON/OFF	
Frequency range	10-500 (option 10-900)	MHz
Gain / Flatness	Typ 35-40 / nom +/-0.5 (+/-2dB @10-900MHz)	dB
Noise Figure	Nom 5	dB
Output power (@1dB compression)	nom 30, 34, 36	dBm
Input / Output impedance	50	Ω
Power supply	100/230	VAC
Class	AB	
VSWR	< 1.5/1	
Input / Output connectors	SMA	
Size / Weight	Rack 19", 1U - typ 5 kg	
Heat exchange	Fan + pulsed air	
Operating temperature	0 to 40	°C
Storage temperature	-40 to +70 non condensing	°C

AMPB8X-D-3x-10.500 - AMPB8X-D-3x-10.900


AMPB8X-D-30-10.500

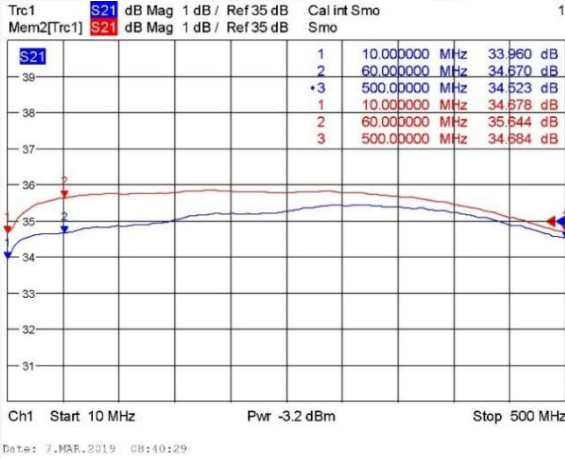


AMPB8X-D-30-10.900

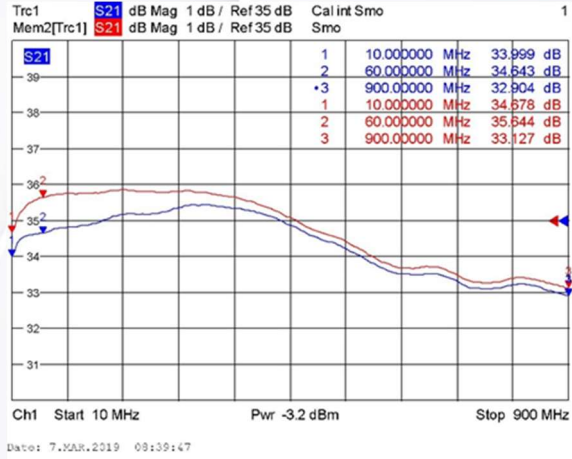


AMPB8X-D-34-10.500

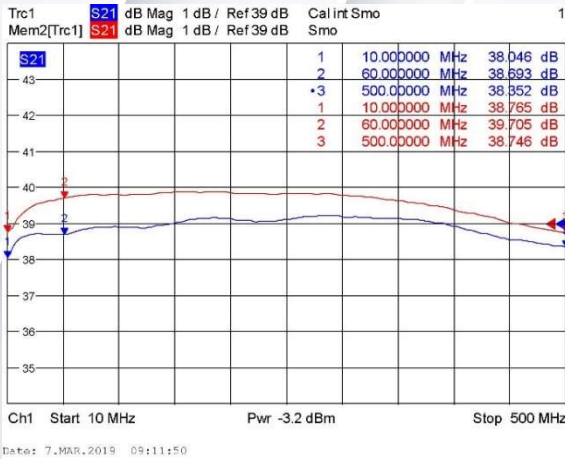

AMPB8X-D-34-10.900

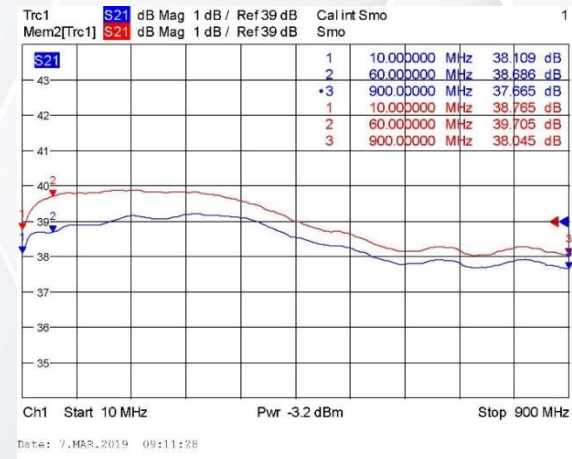

AMPB8X-D-36-10.500

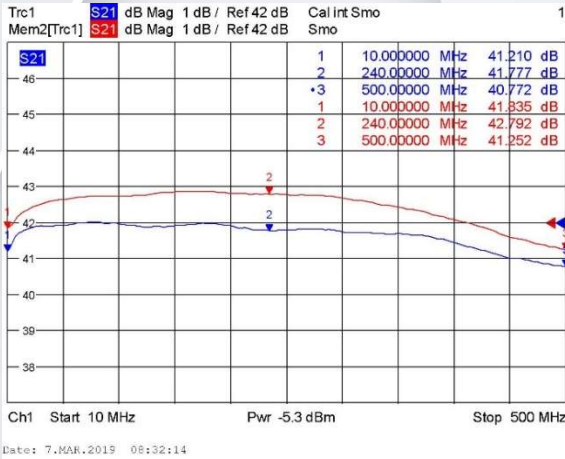

AMPB8X-D-36-10.900

